




PTT 5.50" (140mm) Setup Heights

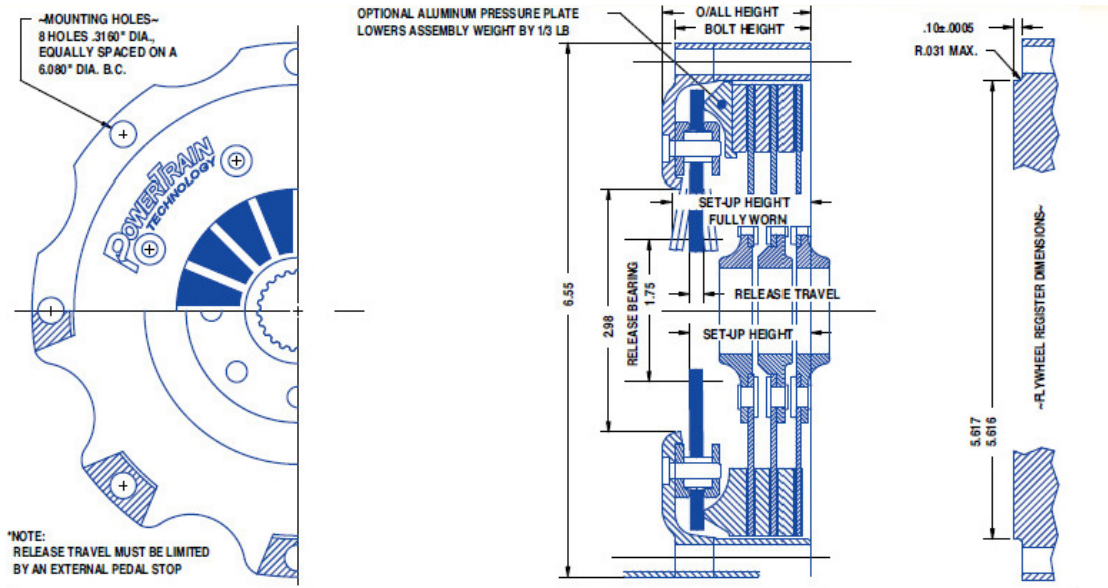

No. Discs	Set-up Heights		Release Travel	Measured Heights		Disc thickness		Assembled Weight
	New	Worn		Overall	Bolt Ht	New	Worn	
1D .105"	0.90" (22.86)	1.06" (26.92)	0.19" (4.83)	1.24" (31.50)	1.09" (27.69)	0.105" (2.67)	0.075" (1.90)	4.0lb/1.82Kg
1D .200"	0.99" (25.15)	1.15" (29.21)	0.19" (4.83)	1.34" (34.04)	1.18" (29.97)	0.200" (5.08)	0.170" (4.32)	4.3lb/1.95Kg
2D .105"	1.19" (30.23)	1.35" (34.29)	0.19" (4.83)	1.53" (38.86)	1.37" (34.80)	0.105" (2.67)	0.090" (2.29)	5.6lb/2.55Kg
2D .200"	1.35" (34.29)	1.54" (39.12)	0.19" (4.83)	1.72" (43.69)	1.56" (39.62)	0.200" (5.08)	0.185" (4.70)	6.0lb/2.73Kg
3D .105"	1.47" (37.34)	1.63" (41.40)	0.19" (4.83)	1.81" (45.97)	1.66" (42.16)	0.105" (2.67)	0.095" (2.41)	7.1lb/3.23Kg
3D .200"	1.75" (44.45)	1.91" (48.51)	0.19" (4.83)	2.09" (53.09)	1.94" (49.28)	0.200" (5.08)	0.190" (4.83)	8.0lb/3.64Kg
4D .105"	1.75" (44.45)	1.91" (48.51)	0.19" (4.83)	2.09" (53.09)	1.94" (49.28)	0.105" (2.67)	0.097" (2.46)	8.7lb/3.95Kg

All PTT Clutches are proudly manufactured in the USA, therefore base figures are shown in Inches. For our European clients Metric figures are shown within brackets using mm.