




PTT 7.25" (184mm) Setup Heights

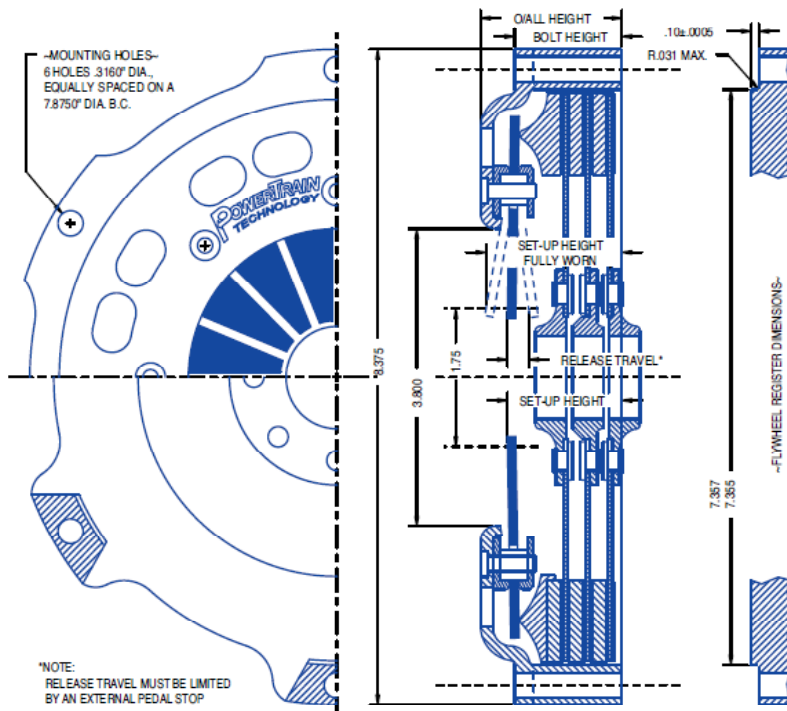

No. Discs	Set-up Heights		Release Travel	Measured Heights		Disc thickness		Assembled Weight
	New	Worn		Overall	Bolt Ht	New	Worn	
1D .105"	0.89" (22.61)	1.13" (28.70)	0.30" (7.62)	1.24" (31.50)	0.80" (20.32)	0.105" (2.67)	0.075" (1.90)	5.4lb/2.45Kg
1D .200"	0.96" (24.38)	1.22" (30.99)	0.30" (7.62)	1.33" (33.78)	0.89" (22.61)	0.200" (5.08)	0.170" (4.32)	5.9lb/2.68Kg
1D .250"	1.03" (26.16)	1.27" (32.26)	0.30" (7.62)	1.58" (40.13)	1.14" (28.96)	0.250" (6.35)	0.220" (5.59)	6.0lb/2.73Kg
2D .105"	1.17" (29.72)	1.41" (35.81)	0.30" (7.62)	1.53" (38.86)	1.09" (27.69)	0.105" (2.67)	0.090" (2.29)	7.7lb/3.50Kg
2D .200"	1.36" (34.54)	1.60" (40.64)	0.30" (7.62)	1.72" (43.69)	1.28" (32.51)	0.200" (5.08)	0.185" (4.70)	8.5lb/3.86Kg
2D .250"	1.46" (37.08)	1.70" (43.18)	0.30" (7.62)	1.81" (45.97)	1.37" (34.80)	0.250" (6.35)	0.235" (5.97)	8.8lb/4.00Kg
3D .105"	1.46" (37.08)	1.70" (43.18)	0.30" (7.62)	1.81" (45.97)	1.37" (34.80)	0.105" (2.67)	0.095" (2.41)	9.9lb/4.50Kg
3D .200"	1.74" (44.20)	1.99" (50.55)	0.30" (7.62)	2.09" (53.09)	1.66" (42.16)	0.200" (5.08)	0.190" (4.83)	11.3lb/5.14Kg
4D .105"	1.74" (44.20)	1.99" (50.55)	0.30" (7.62)	2.09" (53.09)	1.66" (42.16)	0.105" (2.67)	0.097" (2.46)	12.3lb/5.59Kg

All PTT Clutches are proudly manufactured in the USA, therefore base figures are shown in Inches.
For our European clients Metric figures are shown within brackets using mm.